

# GREEN'UP

## YOUR ELECTRIC VEHICLE




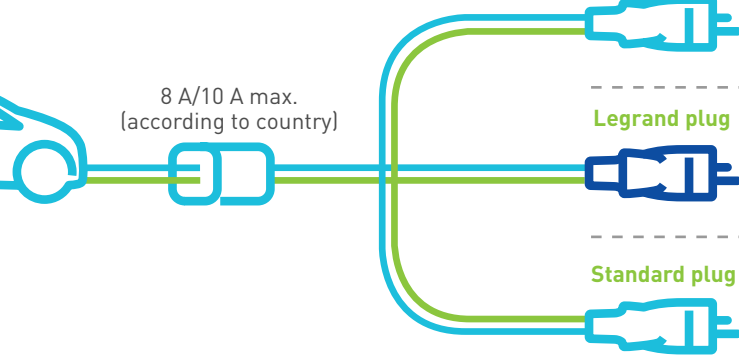







CHARGING SOLUTIONS  
FOR ELECTRIC VEHICLES  
OR PLUG-IN HYBRIDS

THE GLOBAL SPECIALIST IN ELECTRICAL  
AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**<sup>®</sup>

# Which infrastructure for normal charging?

CHARGING MODE	CHARGING SOLUTIONS	
MODE 1		<p>8 A/10 A max. (according to country)</p>  <p>Scooter, e-bike</p>
MODE 2	<p>SINGLE-PHASE</p>  <p>Electric car</p>	<p>8 A/10 A max. (according to country)</p>  <p>Standard plug</p> <p>Legrand plug</p> <p>Standard plug</p> <hr/> <p>16 A max.</p>  <p>Legrand plug</p>
MODE 3	<p>SINGLE-PHASE</p>  <p>Electric car</p>	<p>Type 2S plug</p> 
	<p>THREE-PHASE</p>  <p>Electric car</p>	<p>Type 2S plug</p> 

	LEGRAND RECOMMENDATIONS	CHARGING TIME for 100 km*
	Non-dedicated conventional socket outlet. NOT RECOMMENDED for electric vehicles	X
Standard socket	Standard plug + dedicated standard socket Limited charge circuit OCCASIONAL	6 hrs
Standard socket	Legrand safety plug + dedicated standard socket Limited charge circuit OCCASIONAL	6 hrs
Green'up Access socket by Legrand	Standard plug + Green'up Access socket by Legrand Safe dedicated access Limited charge circuit PERMITTED	6 hrs
Green'up Access socket by Legrand	Legrand plug + Green'up Access socket by Legrand Safe, dedicated circuit, optimised charging RECOMMENDED	3 hrs
3.7 kW Green'up Premium charging station	Type 2S plug Safe, dedicated circuit, optimised charging RECOMMENDED	3 hrs
7.4 kW Green'up Premium charging station		1 hr 30
11 kW charging station		1 hr
22 kW Green'up Premium charging station		30 min

\* Average charging time for a range of 100 km, based on average consumption of 12 kW/h per 100 km. Varies according to the electric car model

# Which charging point at home?

4

GREEN'UP CHARGING SOLUTIONS

## GREEN'UP ACCESS READY TO INSTALL KIT

SOCKET + BRACKET + RCBO

### SOLUTION THAT IS **INEXPENSIVE, ADAPTABLE AND SAFE**

With the Green'up Access socket, Legrand makes it easy to charge vehicles at home. Inexpensive, simple to install, safe, they can also be used for all conventional purposes, and are specially prewired so they can easily be replaced with a mode 3 charging station.



**Heavy-duty socket, identified for electric vehicles, also suitable for any application**  
Conforms to IEC 60884-1

**8 to 16 A charging in complete safety** of all electric vehicles with a mode 1 or mode 2 cable, regardless of how much charging power is required by the vehicle



**Optimum safety**  
Surface treatment of metal contacts to improve electrical conductivity

**MODE 2**

**Charging time**



IP 55 - IK 08  
16 A - 3.7 kW  
single-phase

Supplied with bracket and RCBO

Line protected by RCBO



### **DETECTION SYSTEM** PATENTED BY LEGRAND

Vehicles detect the secure Green'up infrastructure and select the maximum power that can be supplied via the socket, resulting in a shorter charging time.



WHEN I'M AT HOME, I CAN CHARGE MY ELECTRIC VEHICLE IN COMPLETE SAFETY

[1] 3 hrs with Legrand coupler, 6 hrs with non-Legrand coupler  
Average charge for a range of 100 km, varies according to the model.

# GREEN'UP PREMIUM CHARGING STATION

## SOLUTION WHICH ALLOWS CHARGING TO BE CONTROLLED LOCALLY OR REMOTELY

The Green'up Premium charging station is used for charging vehicles in mode 2 and mode 3. With its native Bluetooth connection it can be used to control charging locally via the EV CHARGE application. When connected to the IP or Wi-Fi network with the communication kit (optional), it allows remote control from a smartphone, tablet computer or PC.



**Delayed start: 3, 6 or 9 hours**  
Option of delaying start by 3, 6 or 9 hours. For charging during the cheap rate period.

**For any electric vehicle model**  
Green'up Access heavy-duty socket for charging in mode 2 and for all applications

**Volt-free contact input**  
For external control of the charging station (time switch, contactor, etc)

**MODE 2**  
**MODE 3 COMMUNICATING**

Charging time



Single-phase Three-phase

IP 44 - IK 08  
3.7/7.4 kW/22 kW  
single-phase and  
three-phase

Line protected by  
RCBO.  
Wiring diagram  
p. 17

**For any electric vehicle model**  
Shuttered T2S EV Plug socket for mode 3 charging.



“  
THANKS TO THE  
EV CHARGE APP, I CAN  
CONTROL CHARGING  
FROM MY TABLET  
COMPUTER, MY  
SMARTPHONE  
OR MY PC



### MANAGING CHARGING

**1 STANDARD (USING BLUETOOTH WITH EV CHARGE)**

- Peak/Off-peak hours override
- Programmable daily charging and power management
- Viewing consumption of the last charge
- Software update



**2 WITH COMMUNICATION KIT (OPTIONAL)**

- Remote control of charging
- Weekly monitoring of consumption (via Wi-Fi router or RJ 45)
- Management via the EV CHARGE app



[1] Average time for full charge according to manufacturer sources, varies according to the model

# Which charging point in collective housing and private commercial sector

6

GREEN'UP CHARGING SOLUTIONS

## IK10 GREEN'UP ACCESS SOCKET

SOCKET + BRACKET

### RUGGED, INEXPENSIVE AND SCALABLE SOLUTION FOR EXPOSED LOCATIONS

With its IK 10 protection giving it excellent resistance to harsh environments, the Green'up Access socket is perfect for use in public car parks and lock-ups. Inexpensive, simple to install, safe, it can also be used for all conventional purposes, and is specially prewired so it can easily be replaced with a mode 3 charging station.

MODES 1 & 2

Charging time



IP 55 - IK 10  
16 A - 3.7 kW  
single-phase

Supplied with bracket  
Available with  
lockable flap

Line protected by  
RCBO.  
Wiring diagram  
p. 14


**8 to 16 A charging in complete safety**  
of all electric vehicles with a mode 1  
or mode 2 cable, regardless of how  
much charging power is required  
by the vehicle




**Optimum safety**  
Surface treatment of metal contacts to  
improve electrical conductivity



Flush mounting or surface  
mounting with frame

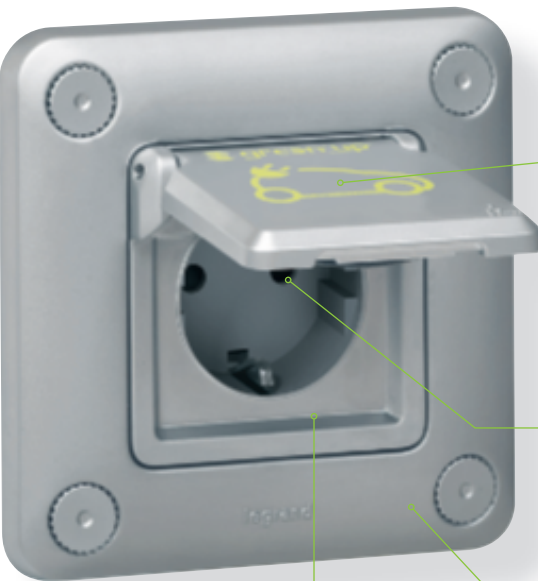

**Heavy-duty socket, identified  
for electric vehicles, also  
suitable for any application**  
Conforms to IEC 60884-1

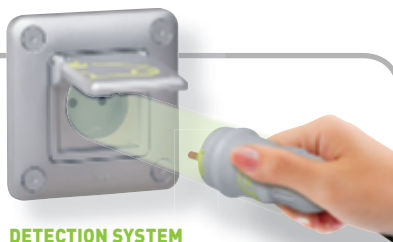

### DETECTION SYSTEM PATENTED BY LEGRAND

Vehicles detect the secure Green'up  
infrastructure and select the  
maximum power that can be  
supplied via the socket, resulting  
in a shorter charging time.



I CAN PARTIALLY  
RECHARGE MY ELECTRIC  
CAR IN A PUBLIC CAR  
PARK WHILE HAVING  
LUNCH WITH FRIENDS

[1] 3 hrs with Legrand coupler, 6 hrs with non-Legrand coupler  
Average charge for a range of 100 km, varies according to the model.

# GREEN'UP PREMIUM IK 10 CHARGING STATION

## SOLUTION FOR COMPANY CAR PARKS

Floor standing or wall mounting, shock-resistant, the Green'up Premium IK 10 charging station is ideal for vehicle fleets. A card reader (optional) can be used to unlock the charging station by identifying the employee and keeps a tally of the electricity used via a web page.



### For any electric vehicle model

Green'up Access heavy-duty socket for charging in mode 2 and for all applications

### For any electric vehicle model

Shuttered T2S EV Plug socket for mode 3 charging.



### Optional card reader

Unlocks the charging station and can keep a tally of the electricity used

### Secure access

Charging station locked/unlocked via the EV CHARGE app



MODES 1 & 2

MODE 3 COMMUNICATING

### Charging time



Single-phase Three-phase

IP 55 - IK 10  
3.7 kW single-phase  
to 22 kW three-phase

Line protected by RCBO.  
Wiring diagram p. 17



## MEDIUM POWER BUSBAR TRUNKING MS 63/100/160 A

In covered car parks and garages, provides the ideal power distribution for Green'up Premium charging stations.



IN THE CAR PARK AT MY PLACE OF WORK OR MY SHARED OWNERSHIP PROPERTY, IT'S SIMPLICITY ITSELF TO IDENTIFY MYSELF AND CHARGE MY ELECTRIC CAR.

## MANAGING CHARGING

### 1 STANDARD (USING BLUETOOTH WITH EV CHARGE)

- Locking with Bluetooth
- Programmable daily charging and power management
- Software update



### 2 WITH COMMUNICATION KIT (OPTIONAL)

- Remote control of charging
- Card-operated access control with RFID reader
- A bank of charging stations can be managed via a web server
- Consumption history



[1] Average time for full charge in mode 3 according to manufacturer sources, varies according to the model



# Which charging point in commercial areas with public access (shopping centres, public car parks, etc)



“

IN THE CAR PARK,  
MY CARD ALLOWS  
ME TO USE THE  
CHARGING STATION.  
I CAN CHARGE MY  
CAR WHILE DOING  
MY SHOPPING



## THREE-PHASE GREEN'UP PREMIUM IK 10 CHARGING STATION

### INTEROPERABLE CHARGING STATION FOR EASE OF MANAGEMENT OCPP-COMPATIBLE CHARGING STATION

It can be controlled by a charging network operator: the Green'Up Premium charging station is easily integrated in the car park manager's billing system.  
Payment for the electricity used can be added to the cost of parking in the space.

**MODE 2**  
**MODE 3 COMMUNICATING**

Charging time



IP 55 - IK 10  
adjustable from 11 to 22 kW  
three-phase

Line protected by RCB0.  
Wiring diagram p. 17

**Charging station can communicate on IP network**  
Compatible with existing operating systems (Modbus, OCPP)



RFID encoder reader identification system built into the charging station which can activate sockets (optional)

Space available for installing modular protection in the base

**For any electric vehicle model**

Green'up Access heavy-duty socket for charging in mode 2 and for all applications

**For any electric vehicle model**

Shuttered T2S EV Plug socket for mode 3 charging.

**CHARGE 2 VEHICLES AT THE SAME TIME**

One type 2S socket and one Green'up Access socket on each side of the charging station



### MANAGING CHARGING

BECOMES 100% COMMUNICATING WITH THE COMMUNICATION KIT (OPTIONAL)

- Supervision and parameter setting in IP on web page
- Modbus and OCPP-compatible charging station (Open Charge Point Protocol)
- Managed with RFID reader

(1) Average time for full charge in mode 3 according to manufacturer sources, varies according to the model

Green'up Premium charging stations

# Which solutions for identifying, measuring, controlling?



### MANAGING WITH AN APP

Access control and control via the EV CHARGE app: monitoring charging and option of locking the charging station via the app (making it unusable by third parties who are not using the customer account), monitoring and display of consumption. Charging programmed via the app for optimised consumption management. Software update via the app.



### CARD-OPERATED ACCESS CONTROL

Green'up Premium charging stations can be integrated in the building's access control system. The charging station is locked and a personal ID card is needed to dispense electricity.



### Consumption measurement

One electricity meter per charging station

MODBUS  
RS 485




An IP converter, electricity meter and protection devices can be integrated in the base of the charging station. For charging stations without a base, tap-off boxes can be installed nearby.

IP PROTOCOL


Green'up Premium charging station with communication kit






**Web server**  
Used to display consumption on any type of screen equipped with a browser: PC, smartphone, tablet computer, TV, etc

+



**Supervision software**  
For displaying measurement on a PC




On a PC: view the charging station operating status, measure electricity consumption, optimise available energy (control charging by dividing energy between the different charging stations).

**MEASUREMENT AND DISPLAY  
I COMMUNICATING  
+ CONTROL OF CHARGING**



**COMMUNICATION KIT WITH USER ACCESS CONTROL (MIFARE RFID)**

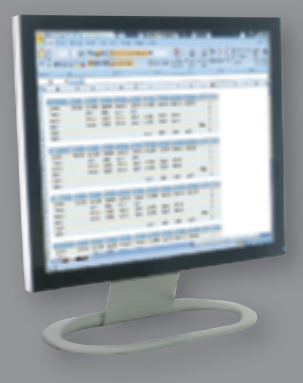
















On a PC: web page  
Record charging sessions by charging station (consumption, number of cards, etc) on electronic files

**100% CONNECTED  
MEASUREMENT AND CONTROL  
OF CHARGING**

# Green'up™ sockets and charging stations

for electric vehicles and plug-in hybrids

		IP	IK	Charging mode	Power (kW)	Number of charging points	Wall mounting	Free standing	Options		Average charging time (in hours) depending on the vehicle and battery type		
									Communication kit	RFID reader (Used with communication kit Cat.No 0 590 56)	Vehicle battery capacity		
											15/16 kW/h	22/24 kW/h	30/32 kW/h
<b>SINGLE-PHASE SOCKETS - 230 V</b>													
	Plastic	55	08	Mode 2 	3,7	1	0 904 70 <sup>(1)</sup> 0 904 72	-	-	-	5 <sup>(2)</sup>	7 <sup>(2)</sup>	-
	Metal	55	10	Mode 2 	3,7	1	0 778 56	-	-	-	5 <sup>(2)</sup>	7 <sup>(2)</sup>	-
	Metal with key	55	10			1	0 778 57	-	-	-	5 <sup>(2)</sup>	7 <sup>(2)</sup>	-
<b>SINGLE-PHASE CHARGING STATIONS - 230 V</b>													
	Plastic	44	08	Mode 3 	3,7 / 4,6	1	0 590 00	0 590 00 + 0 590 52	0 590 56	-	4	6	8
					7,4	1	0 590 01	0 590 01 + 0 590 52	0 590 56	-	2,5	3,5	4,5
	Plastic	44	08	Modes 2 and 3 	3,7 / 4,6	1	0 590 30	0 590 30 + 0 590 52	0 590 56	-	4	6	8
					7,4	1	0 590 35	0 590 35 + 0 590 52	0 590 56	-	2,5	3	4,5
	Metal	55	10	Modes 2 and 3 	3,7 / 4,6	1	0 590 41 + 0 590 53	0 590 41 + 0 590 54	0 590 56	0 590 59 + 0 590 56	4	6	8
						2	0 590 42 + 0 590 53	0 590 42 + 0 590 54	0 590 56	0 590 59 + 0 590 56	4	6	8
		55	10		1	0 590 43 + 0 590 53	0 590 43 + 0 590 54	0 590 56	0 590 59 + 0 590 56	2,5	3	4,5	
					2	0 590 44 + 0 590 53	0 590 44 + 0 590 54	0 590 56	0 590 59 + 0 590 56	2,5	3	4,5	
<b>THREE-PHASE CHARGING STATIONS - 400 V</b>													
	Plastic	44	08	Mode 3 	22	1	0 590 02	0 590 02 + 0 590 52	0 590 56	-	1	1	2
	Metal	55	10	Modes 2 and 3 	22	1	0 590 48 + 0 590 53	0 590 48 + 0 590 54	0 590 56	0 590 59 + 0 590 56	1	1	2
						2	0 590 49 + 0 590 53	0 590 49 + 0 590 54	0 590 56	0 590 59 + 0 590 56	1	1	2

1: Ready to install version, supplied with RCBO

2: For vehicles with cable equipped with Legrand Green'up plug


## Green'up™ Access ready to install kit

for electric vehicle charging



The Green'up system is based on an innovative Legrand technology, activating "maximum power" mode and ensuring a secure and fast charging process.

Complete solution:  
Mode 2 socket + RCBO

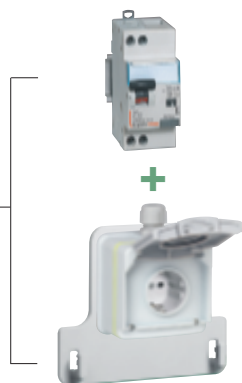

0 904 70


Installation principle p. 14  
Dimensions p. 14

### Ready to install kit - 16 A EV

Pack	Cat.Nos	Ready to install kit - 16 A EV
1	0 904 70	<p>Allows creating a safe infrastructure for electric and hybrid vehicle charging, using Mode 2 (or Mode 1) charging cables. Suitable for residential and workplace use</p> <p>Power supply directly from the electrical panel: 1 dedicated line 3 x 2.5 mm<sup>2</sup> cable, protected with one RCBO (one line per socket)</p> <p>The kit contains:</p> <ul style="list-style-type: none"> <li>- 1 heavy duty German standard Green'up Access plastic socket, with flap cover, IP 55 - IK 08 - 16 A - 230 V - 16 A EV, 6 mm<sup>2</sup> screw terminals, according to IEC 60884-1, NF C 61-314, VDE 620-1</li> <li>- 1 base for hanging up the vehicle charging cable control box</li> <li>- 1 RCBO 20 A, C curve, 30 mA, Hpi type Cat.No 4 107 54</li> </ul> <p>The use of a surge protective device is recommended Recommended installation height: between 0.80 and 1.20 m from the floor</p>

## Green'up™ Access sockets

16 A - 230 V - 16 A EV - for electric vehicles

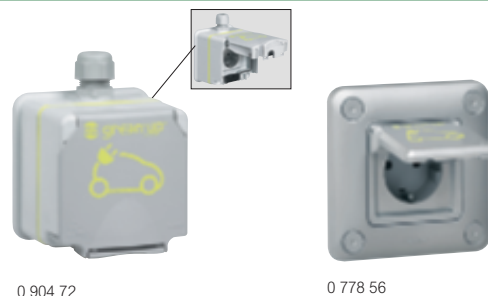

0 904 72

0 778 56

Installation principle p. 14  
Dimensions p. 14


Used for safely charging rechargeable electric and hybrid vehicles which take Mode 2 cord (compatible with Mode 1)  
Connected to the consumer panel via one 3 x 2.5 mm<sup>2</sup> dedicated line (1 line per socket) protected by 30 mA - 20 A C curve, type A or HPI RCBO (or 30 mA type A or HPI RCCB + 20 A C curve circuit breaker)  
Recommended installation height: 1.30 m from the floor  
Suitable for residential and workplace use

### Pack Cat.Nos Mode 1 and Mode 2 sockets - 16 A EV

Pack	Cat.Nos	Mode 1 and Mode 2 sockets - 16 A EV
1	0 904 72	<p>Heavy-duty mechanisms with silvered contacts Single-phase sockets - screw connection - 230 V Supplied with base Cat.No 0 904 78 for hanging up the vehicle charging cable control box For charging 1 vehicle Conform to IEC 60-884-1</p> <p><b>IP 55 - IK 08 surface-mounting</b> Suitable for installation in private houses Plastic socket with flap cover Supplied complete with surface mounting box fitted with an ISO 20 cable gland Dimensions (H x W x D): 98 x 98 x 70 mm (exc. cable gland)</p> <p>German standard socket outlet</p>
1	0 778 56	<p><b>IP 55 - IK 10 flush-mounting - metal socket</b> Suitable for installation in private houses, lock-up garages, parking lots, etc Supplied complete with plate and support Mounting in 1-gang Batibox flush-mounting box depth 50 mm Can be surface mounted with box Cat.No 0 778 90 Dimensions (H x W x D): 110 x 110 x 13.5 mm</p> <p>German standard socket outlet</p>
1	0 778 57	<p><b>IP 55 - IK 10 flush-mounting - metal socket with locked flap cover</b> Suitable for installation in private houses, lock-up garages, parking lots, etc Supplied complete with plate and support Mounting in 1-gang Batibox flush-mounting box depth 50 mm Can be surface mounted with box Cat.No 0 778 90 Dimensions (H x W x D): 110 x 110 x 13.5 mm Supplied complete with a unique set of 2 keys in order to restrict access to the socket</p> <p>German standard socket outlet</p>




**Installation principle for an individual Mode 2 socket**

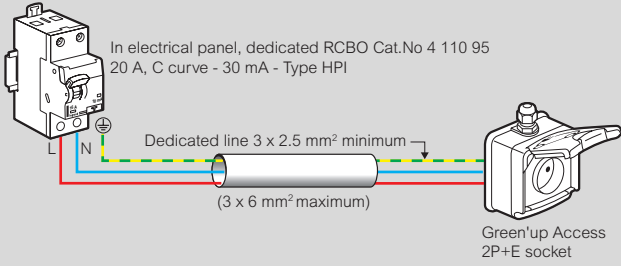


- Can be controlled by clock/switch type control units, etc. (to be ordered separately)
- Use of a surge protective device is recommended

**Use of bracket Cat.No 0 904 78**

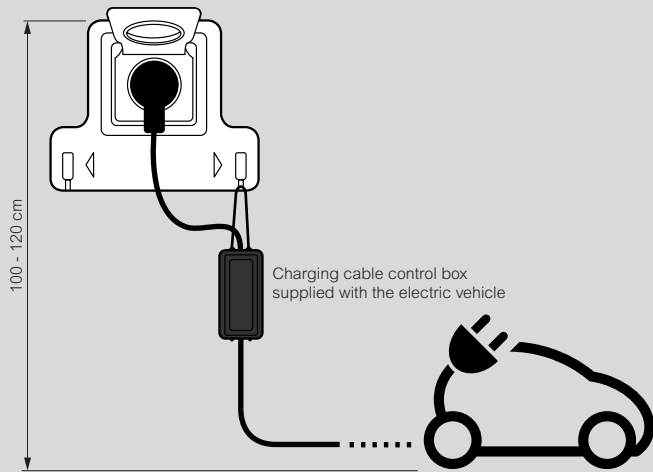


**Dimensions**


Cat.No 0 904 72

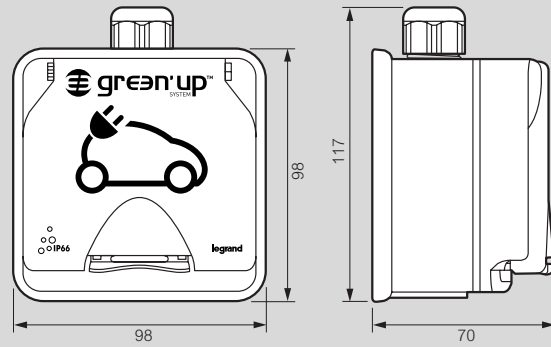


Cat.No 0 904 78

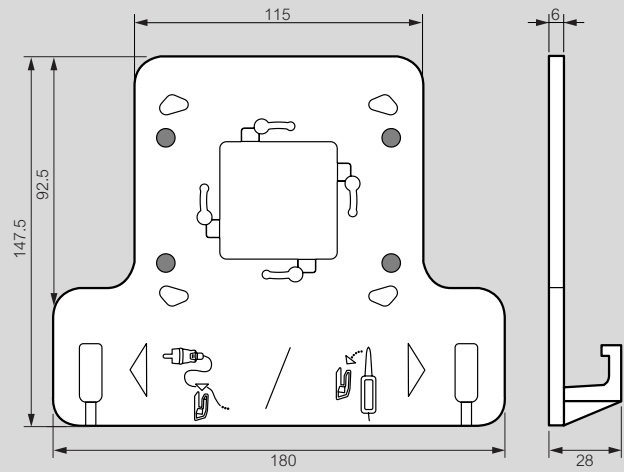

Cat.No 0 778 56

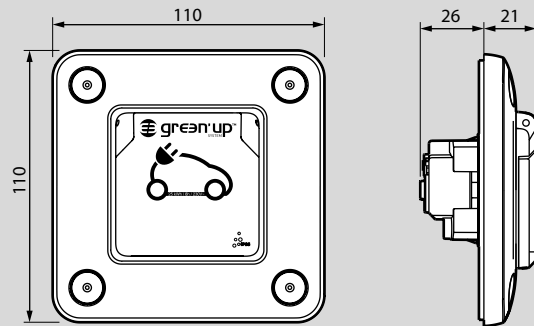

Cat.No 0 778 57

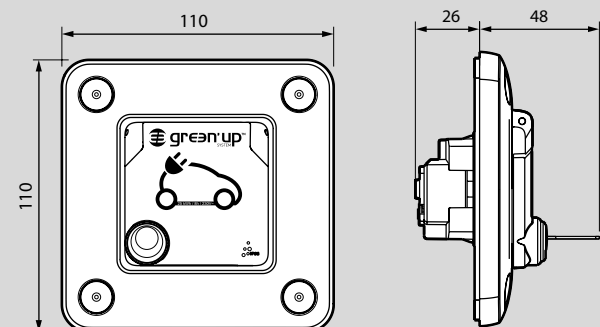



# Green'up™ Premium charging stations

for electric vehicle charging



Technical characteristics and wiring diagrams **p. 17 and 18**  
Dimensions **(p. 18 and 19)**

For charging all electric vehicles (equipped with single-phase and three-phase chargers) and plug-in hybrids in Mode 2 or Mode 3 in complete safety. Compliant with standards IEC 61851-1 and 61851-22.  
Charging station power can be adjusted with adapted protection devices and power supply circuits. Local wireless communication via embedded Bluetooth for configuration and control of charging station via smartphone or tablet using the IOS or Android compatible app.  
Available functions: changing station status, daily charging program, charging station activation/deactivation, power management, firmware updates. Application additional functions: weekly changing program, consumption monitoring with cloud storage for data, status notification. Remote wireless IP communication with communication kit Cat.No 0 590 56.  
Equipped with:  
- a 2P+E socket with Green'up Access safety shutter featuring the innovative Green'up system, a Legrand Group technology which activates "maximum power" mode, ensuring fast, safe charging for 2P+E plugs (Mode 2)<sup>(2)</sup>  
- a 3P+N+E (T2S) Type 2 socket with blanking plates (single-phase or three-phase operation) with pilot wire (Mode 3).  
Connected and protected from the electrical panel via 1 protected dedicated line (2 dedicated lines for 2-vehicle charging station).  
Off-peak control option via contactor, clock and switch (volt-free contact input 12 V<sub>~</sub>).  
Remote ON/OFF control option (volt-free contact input 12 V<sub>~</sub>).

Pack	Cat.Nos	Plastic single-phase charging stations - Mode 3
1	0 590 00	IP 44 - IK 08 Wall mounting charging stations to be equipped with pedestal Cat.No 0 590 52 for fixing to the ground <b>3,7/4,6 kW - 16/20 A</b> For charging 1 vehicle <b>7,4 kW - 32 A</b> Power adjustment option: - 3,7/4,6/5,7/7,4 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 01	IP 44 - IK 08 Wall mounting charging stations to be equipped with pedestal Cat.No 0 590 52 for fixing to the ground <b>3,7/4,6 kW - 16/20 A</b> For charging 1 vehicle <b>7,4 kW - 32 A</b> Power adjustment option: - 3,7/4,6/5,7/7,4 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 30	IP 44 - IK 08 Wall mounting charging stations to be equipped with pedestal Cat.No 0 590 52 for fixing to the ground <b>3,7/4,6 kW - 16/20 A</b> For charging 1 vehicle <b>7,4 kW - 32 A</b> Power adjustment option: - 3,7/4,6/5,7/7,4 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 35	IP 44 - IK 08 Wall mounting charging stations to be equipped with pedestal Cat.No 0 590 52 for fixing to the ground <b>3,7/4,6 kW - 16/20 A</b> For charging 1 vehicle <b>7,4 kW - 32 A</b> Power adjustment option: - 3,7/4,6/5,7/7,4 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 41	IP 55 - IK 10 Must be equipped with the following for: - wall mounting version: a mounting kit supplied with a metal front cover Cat.No 0 590 53 - free standing version: a pedestal supplied with a metal front cover Cat.No 0 590 54 <b>3,7/4,6 kW - 16/20 A</b> For charging 1 vehicle
1	0 590 42	IP 55 - IK 10 Must be equipped with the following for: - wall mounting version: a mounting kit supplied with a metal front cover Cat.No 0 590 53 - free standing version: a pedestal supplied with a metal front cover Cat.No 0 590 54 <b>3,7/4,6 kW - 16/20 A</b> For charging 2 vehicles simultaneously

Pack	Cat.Nos	Metal single-phase charging stations - Modes 2 and 3 (continued)
1	0 590 43	<b>7,4 kW - 32 A</b> Power adjustment option: - 3,7/4,6/5,7/7,4 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 44	<b>7,4 kW - 32 A</b> Power adjustment option: - 3,7/4,6/5,7/7,4 kW - 16/20/25/32 A For charging 2 vehicles simultaneously
1	0 590 02	IP 44 - IK 08 Wall mounting charging station to be equipped with pedestal Cat.No 0 590 52 for fixing to the ground <b>22 kW - 32 A</b> Power adjustment option: - 11/15/18/22 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 48	IP 55 - IK 10 Must be equipped with the following for: - wall mounting version: a wall mounting kit supplied with a metal front cover Cat.No 0 590 53 - free standing version: a mounting pedestal supplied with a metal front cover Cat.No 0 590 54 <b>22 kW - 32 A</b> Power adjustment option: - 11/15/18/22 kW - 16/20/25/32 A For charging 1 vehicle
1	0 590 49	IP 55 - IK 10 Must be equipped with the following for: - wall mounting version: a wall mounting kit supplied with a metal front cover Cat.No 0 590 53 - free standing version: a mounting pedestal supplied with a metal front cover Cat.No 0 590 54 <b>22 kW - 32 A</b> Power adjustment option: - 11/15/18/22 kW - 16/20/25/32 A For charging 2 vehicles simultaneously

1: Charging stations compliant with ZE Ready 1.2 and EV Ready specifications for construction regulations applicable to these products. ZE Ready and EV Ready are registered trademarks of Renault.

2: For vehicles with cable equipped with Legrand Green'up plug

## Green'up™ Premium charging stations

equipment for wall mounting or fixing to the ground



0 590 52

Dimensions (p. 18 and 19)


Pack	Cat.Nos	Equipment for mounting charging stations on the wall or fixing to the ground
1	0 590 52	<b>For plastic charging stations</b> Pedestal for fixing plastic charging stations to the ground Option to integrate Plexo <sup>3</sup> boxes Cat.No 0 019 04/06/08(4 to 16 modules) for the protection devices
1	0 590 53	<b>For metal charging stations</b> Wall mounting kit with metal front cover
1	0 590 54	Pedestal for fixing metal charging stations to the ground Supplied with metal front cover Option to integrate protection devices on plates or rail chassis (dimensions equivalent to Atlantic box 600 x 400 mm)

## Green'up™ Premium charging stations

communication options



Identification via RFID badge  
0 590 59 + 0 590 56



0 767 11



Pack	Cat.Nos	Communication kit
1	0 590 56	For controlling functions embedded in the charging station and configuring the charging station remotely from a smartphone or PC via IP (RJ 45) or Wi-Fi Access control: for association with centralised readers Cat.No 0 767 04 or standalone readers via the Wiegand protocol <b>IP communication</b> For connecting the charging station to the installation's IP network and ensuring its compatibility with the following protocols: - OCPP 1.6 and 2.0 - MODBUS RS 485 (one MODBUS address per single charging station and two MODBUS addresses per double charging station)
1	0 590 59	<b>RFID reader</b> RFID system (identification via RFID badge, integrated RFID encoder reader) available on metal charging stations with communication kit Cat.No 0 590 56 Supplied with 1 badge to be activated Additional badges to be ordered separately ISO format Mifare Classic technology Cat.No 0 767 11/12/13
1	0 767 11	<b>13.56 MHz badges for badge readers</b> <b>ISO format badges</b> Dim. 50 x 80 mm 13.56 MHz Mifare contactless badge
1	0 767 13	13.56 MHz Mifare contactless badge 4 KB extended memory
1	0 767 12	Mifare contactless dual technology badge + chip 125 KHz Required for operating an installation with car park reader (customised)
1	4 149 47	<b>Energy management multi-support web servers</b> Allow remote configuration, test, control and visualization, via a web browser on PCs, smartphones, web viewers, tablet computers, of data collected from: protection devices (DX <sup>2</sup> add-on modules with integrated measurement control unit, DPX <sup>3</sup> and DMX <sup>3</sup> ), EMDX <sup>3</sup> electricity meters and multi-function measuring units, CX <sup>3</sup> energy management system and Green'up charging stations for electric vehicles. Direct IP connection <b>rail mounting</b> Power supply: 9 to 28 V = with the help of a single-phase switching mode power supply Cat.No 1 467 21 (see Legrand general catalog) to be ordered separately
1	4 149 48	For 32 Modbus addresses or 32 pulse modules
1	4 149 49	For 255 Modbus addresses or 255 pulse modules

Number of modules

4

4

### Fixing on plate


# Green'up™ Premium charging stations

for electric vehicle charging

## Installation principle


Note: the wiring must be doubled up for a 2-vehicle charging station. The installation of a surge protective device is recommended.

### Single-phase charging stations - Mode 3

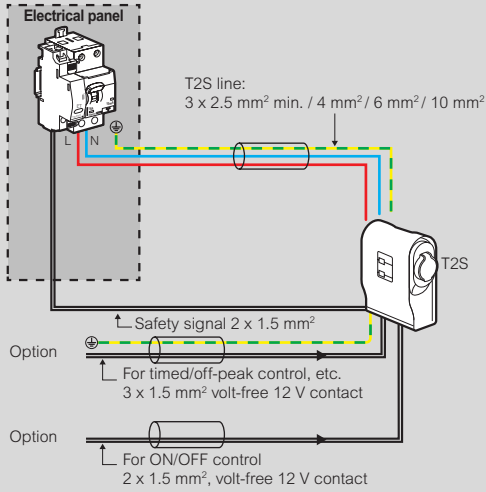

Cat.No	0 590 00		0 590 01	
Power setting (kW)	3,7	4,6	5,8	7,4
Charging station rating (A)	16	20	25	32
T2S line protection rating	20 A, C curve	25 A, C curve	32 A, C curve	40 A, C curve
RCD	30 mA Type F (e.g. Hpi)	30 mA Type F (e.g. Hpi)	30 mA Type F (e.g. Hpi)	30 mA Type F (e.g. Hpi)
T2S line protection RCBO	4 110 95 (6000/10 kA)	4 110 96 (6000/10 kA)	4 110 97 (6000/10 kA)	4 110 98 (6000/10 kA)
T2S line csa (mm² minimum)	2,5	4	6	10
Shunt trip / safety signal	4 062 76	4 062 76	4 062 76	4 062 76


### Single-phase charging stations - Modes 2 and 3

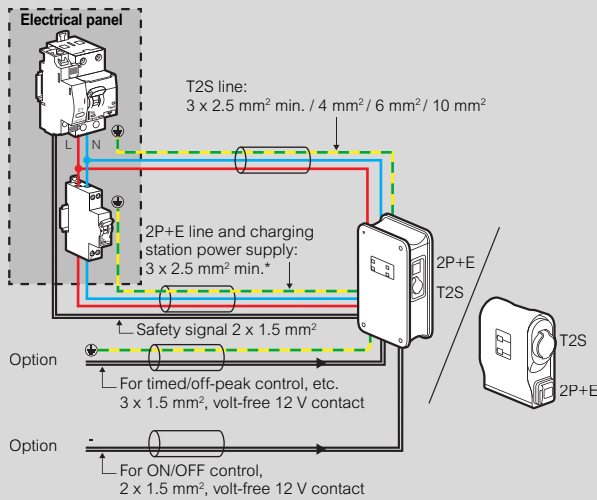

Cat.No	0 590 30/41/42		0 590 35/43/44	
Power setting (kW)	3,7	4,6	5,8	7,4
Charging station rating (A)	16	20	25	32
T2S line protection rating	20 A, C curve	25 A, C curve	32 A, C curve	40 A, C curve
RCD	30 mA Type F (e.g. Hpi)	30 mA Type F (e.g. Hpi)	30 mA Type F (e.g. Hpi)	30 mA Type F (e.g. Hpi)
T2S line protection RCBO	4 110 95 (6000/10 kA)	4 110 96 (6000/10 kA)	4 110 97 (6000/10 kA)	4 110 98 (6000/10 kA)
T2S line csa (mm² minimum)	2,5	4	6	10
Intensité protection ligne 2P+T (A)	No 2P+E line	20 A, C curve	20 A, C curve	20 A, C curve
Disjoncteur protection ligne 2P+T	No 2P+E line	4 077 43 (6000/10 kA)	4 077 43 (6000/10 kA)	4 077 43 (6000/10 kA)
Section ligne 2P+T (mm² minimum)	No 2P+E line	2,5	2,5	2,5
Shunt trip / safety signal	4 062 76	4 062 76	4 062 76	4 062 76

\* Except for charging stations set at 16 A / 3.7 kW

### Three-phase charging stations

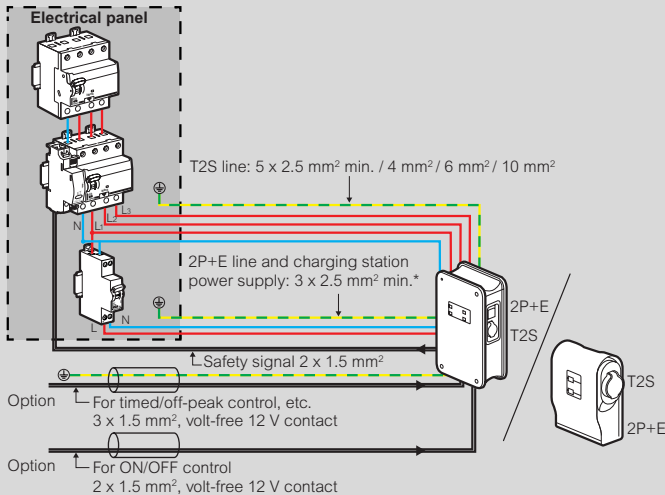

Cat.No	0 590 02/48/49			
Power setting (kW)	11	15	18	22
Charging station rating (A)	16	20	25	32
T2S line protection rating	20 A, C curve	25 A, C curve	32 A, C curve	40 A, C curve
RCD	30 mA Type B	30 mA Type B	30 mA Type B	30 mA Type B
RCCB	4 118 46	4 118 46	4 118 46	4 118 46
T2S line protection circuit breaker	4 079 29 (6000/10 kA)	4 079 30 (6000/10 kA)	4 079 31 (6000/10 kA)	4 079 32 (6000/10 kA)
T2S line csa (mm² minimum)	2,5	4	6	10
2P+E line protection rating	20 A, C curve	20 A, C curve	20 A, C curve	20 A, C curve
2P+E line protection circuit breaker*	4 077 43 (6000/10 kA)	4 077 43 (6000/10 kA)	4 077 43 (6000/10 kA)	4 077 43 (6000/10 kA)
2P+E line csa (mm² minimum)	2,5	2,5	2,5	2,5
Shunt trip / safety signal	4 062 76	4 062 76	4 062 76	4 062 76

\* Except 0 590 02

# Green'up™ Premium charging stations

for electric vehicle charging (continued)

## Estimated charging time for the most sold vehicles in January 2017

Manufacturer	Model	Starting from (year)	Battery pack (KWH)	Mode 2 Green'Up Access	3,7 / 4,6 KW	7 KW	22 KW AC	Estimated charging time with Legrand charging station <sup>(1)</sup>
BMW	I3	2013	22	X	X	X	X (11 KW)	2 h
BMW	I3	2016	33	X	X	X	X (11 KW)	3 h
Bolloré	BlueCar	2011	30	X	X			8 h
Citroën	C-Zero	2010	16	Green'Up	X			6 h
Citroën	E Méhari	2016	30	X	X			8 h
Citroën	Berlingo	2013	22	Green'Up	X	Optional		4 h
Hyundai	Ioniq	2016	28	X	X			7 h
KIA	Soul EV	2015	27	X	X	X		4 h
Mercedes	Classe B Electric Drive	2015	28	X	X	X	X (11 KW)	3 h
Mitsubishi	I-Miev	2010	16	X	X			6 h
Nissan	Leaf	2011	24	X	X	X 2014		4 h
Nissan	Leaf	2015	30	X	X	X		6 h
Nissan	e-NV200	2014	24	X	X	Optional		4 h
Opel	e-Ampera	2017	60	X	X	X		9 h
Peugeot	Ion	2010	16	X	X			6 h
Peugeot	Partner	2013	22	Green'Up	X	Optional		4 h
Renault	ZOE	2017	41	Green'Up	X	X	X	2h30
Renault	ZOE	2012	22	Green'Up	X	X	X	1h30
Renault	Kangoo ZE	2011	22	Green'Up	X			7 h
Renault	Kangoo ZE	2016	33	Green'Up	X	X		6 h
Smart	Fortwo	2011	18	X	X	Optional	Optional	4 h
Smart	Forfour	2014	18	X	X	Optional	Optional	4 h
Tesla	Model S	2012	from 60 to 100	X	X	X	X 11 KW and 22 KW optional	6/10 h (depending on the version)
Tesla	Model X	2016	from 60 to 100	X	X	X	X 11 KW and 22 KW optional	6/10 h (depending on the version)
Volkswagen	e-Golf	2015	24	X	X	X		4 h
Volkswagen	e-Up	2014	18	X	X			6 h


1: Estimated time for full charging, depending on the capacity of the battery on the fastest charging station

Charging stations compliant with ZE Ready 1.2 and EV Ready 1.4F specifications for construction regulations applicable to these products. ZE Ready and EV Ready are registered trademarks of Renault.

## Dimensions and mounting for plastic charging stations (mm)


### Wall mounting charging stations

Cat.No 0 590 00/01/02/30/35

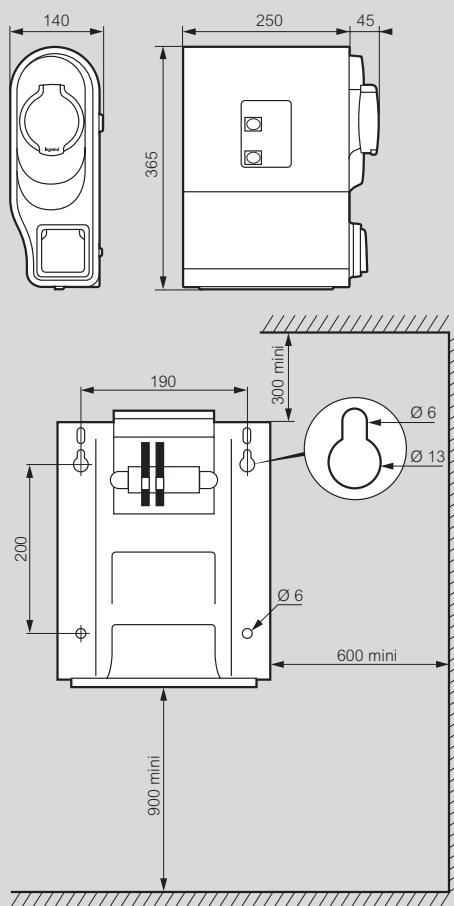

### Free standing charging stations

Cat.No 0 590 00/01/02/30/35 + 0 590 52

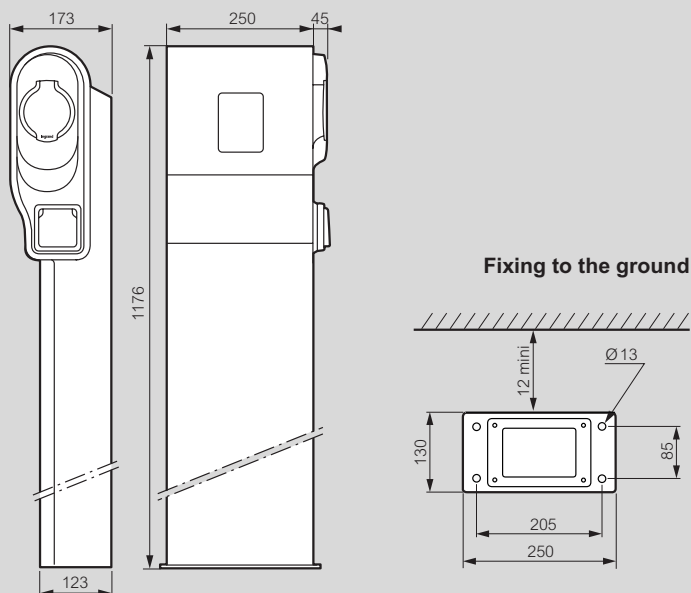


# Green'up™ Premium charging stations

for electric vehicle charging (continued)

## ■ Dimensions and mounting for metal charging stations


### Wall mounting charging stations with front cover

Cat.No 0 590 41/42/43/44/48/49 + 0 590 53

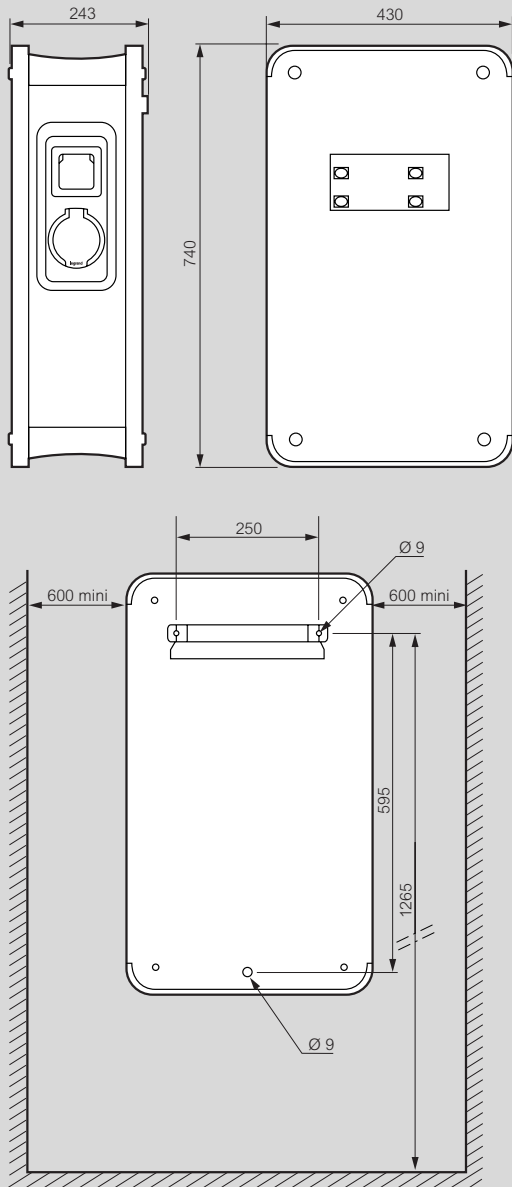


### Free standing charging stations with front cover

Cat.No 0 590 41/42/43/44/48/49 + 0 590 54

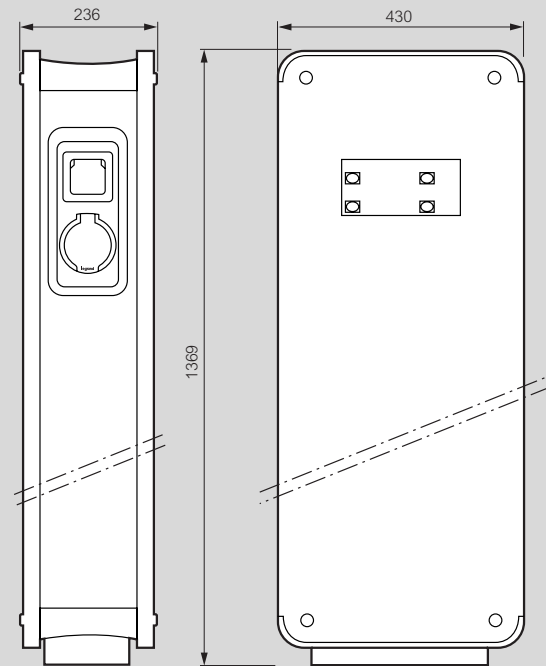

### Fixing to the ground





## FOLLOW US ALSO ON

@ legrand.com

 youtube.com/user/legrand

 facebook.com/Legrand

 twitter.com/Legrand

 pinterest.com/legrandgroup

 instagram.com/legrandnews



### Head office

and International Department  
87045 Limoges Cedex - France

Tel. : + 33 (0) 5 55 06 87 87

Fax: + 33 (0) 5 55 06 74 55